



**WESTERN
OILFIELD
SPECIALTIES CORP.**


Lift Subs

Western Oilfield Specialties supplies a variety of lift subs for different applications.

These subs can be used on the top of an insert pump or polished rod to provide an elevator relief and additionally can provide centralization within the tubing when supplied with a molded rod guide. Other applications include using lift subs between fiberglass rods or sinker bars for handling or centralization.

All subs are made from high strength and corrosion resistant 4140 alloy material, and have wrench flats machined on both ends. The standard lift sub has an overall length of 15", the lift sub with molded guide is 21" long with the guide offset to provide proper spacing for elevators. The body has a 7/8" diameter, suitable for use with 3/4" x 7/8" elevators.

All lift subs are available with electroless nickle plating (ENP) for corrosive service.

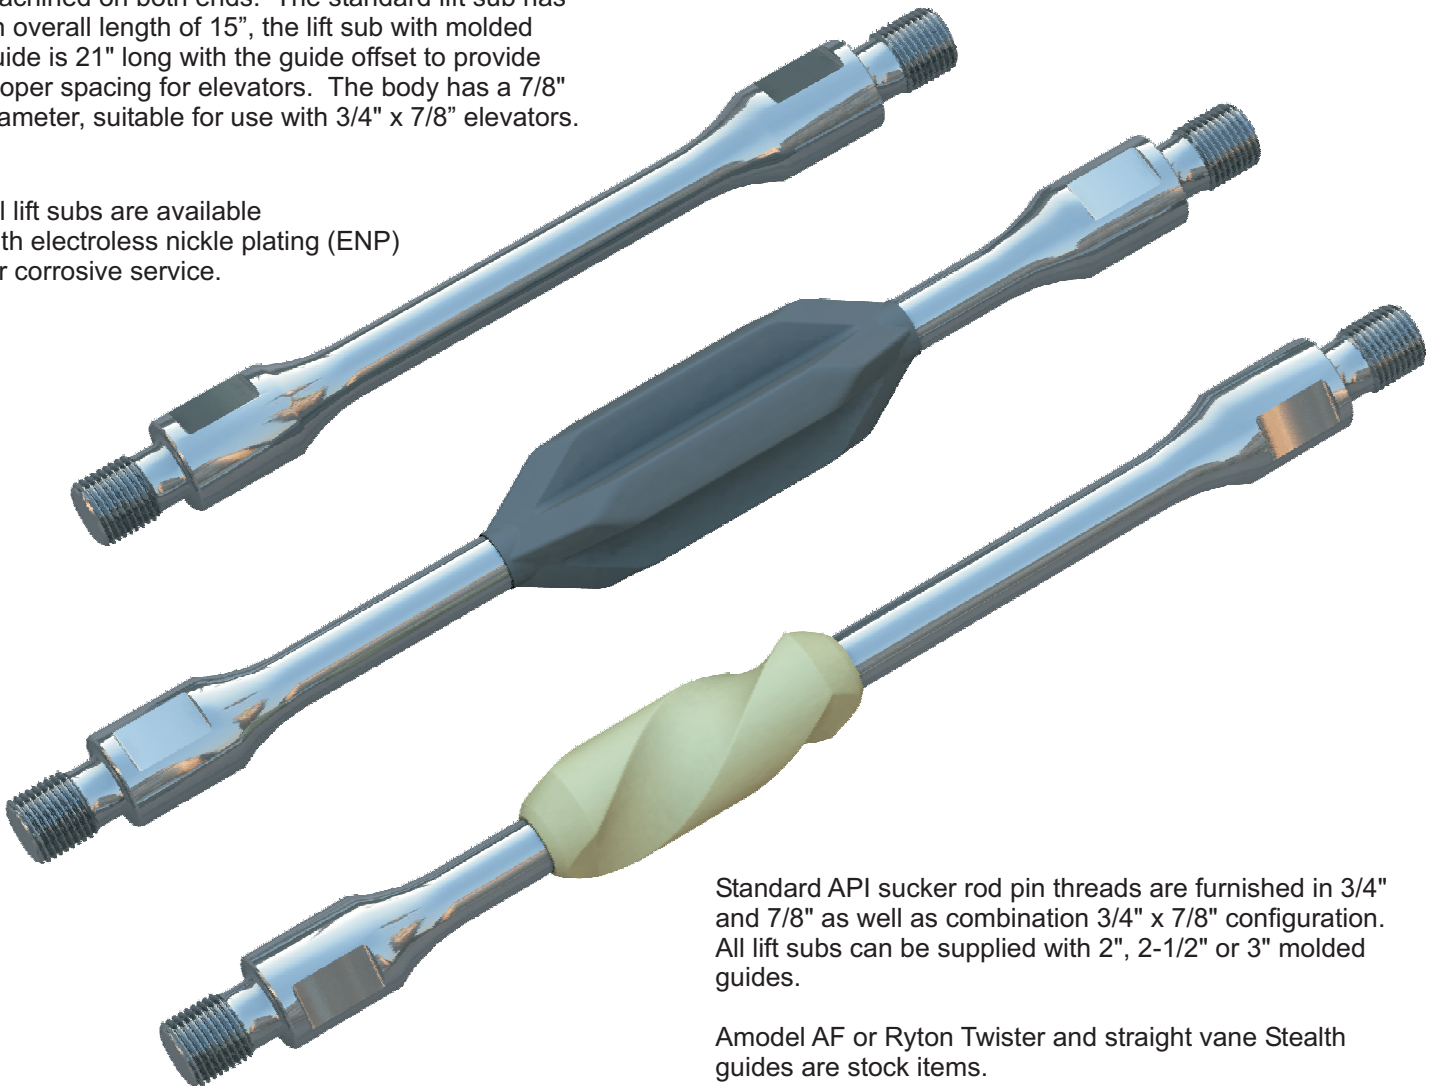

Standard API sucker rod pin threads are furnished in 3/4" and 7/8" as well as combination 3/4" x 7/8" configuration. All lift subs can be supplied with 2", 2-1/2" or 3" molded guides.

Amodel AF or Ryton Twister and straight vane Stealth guides are stock items.

Western Oilfield Specialties Corp.
7108-56 Ave. Edmonton, AB T6E 1E4
www.westernoilfieldspecialties.com

Phone: (780) 437-7733
Fax: (780) 437-7792
Toll Free: 1-877-437-7733